

YARIS CLUB UK KNOWLEDGE BASE



Head Unit Fitting Phase 1 & 2

So what you need to do is firstly is pull off the Speedometer by gripping sides and pull, quite tricky, but don't worry it will come out eventually...




This is why its different in phase two, in phase one you can ignore the steps involving taking the speedometer out.

After doing this, again for phase 2 only, you have you unscrew the screw holding dash to the dash...as shown here by the arrow and circle



After this you need to take heater knobs off and unscrew the screws as shown in the picture. When you have done that, place your hands where the red lines are along dash (picture went a bit off, but you can figure it out), grab the edges and pull, and I mean really yank it! (don't be scared!)

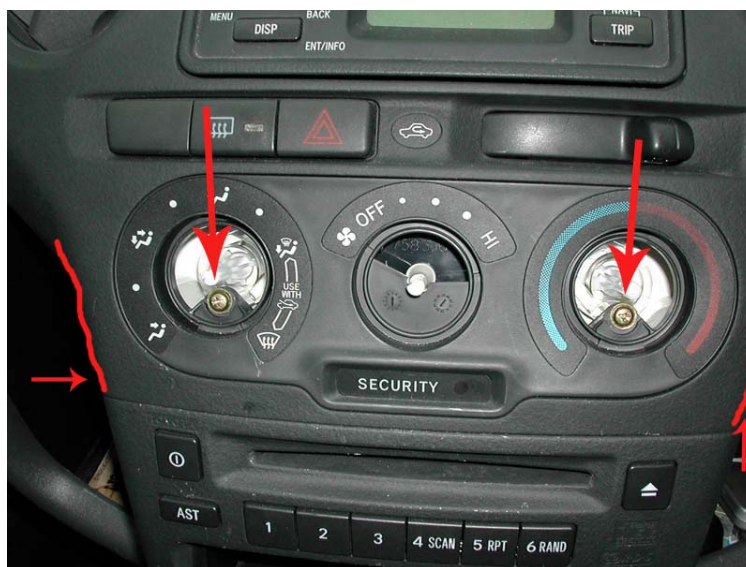


You should end up in this situation



Try and put this put this out of the way without breaking the wiring, I just shoved it in speedo dash hole and it stuck it in there, its holds it pretty well

Anyway, now you need to unscrew bottom half, you need to unscrew the screws shown by the arrows here....(Screws cannot be seen in pic, arrows show where it would be)

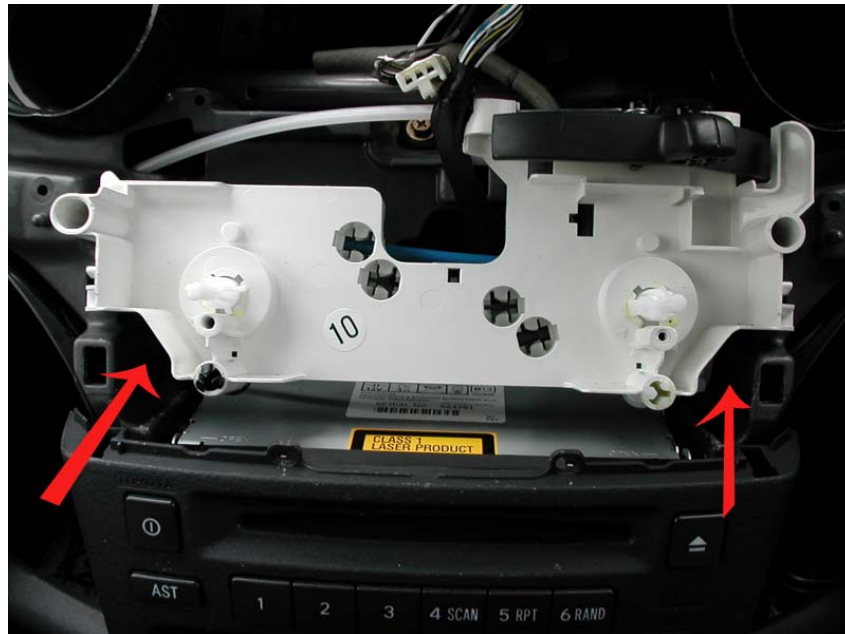

Now remove the ashtray (press down on metal tab and pull it out) then unscrew the screws there as shown here...



Now again grab the sides and pull, I found it easier to pull at the very bottom where dashboard is and lever it out as far as possible. Then I gripped the top and placed my thumbs on the sides of top bit, I levered with my thumb (pushed with my thumb) and it came out with a bit of a fight...but at least you don't hit yourself


Disconnect ALL the wiring that goes into the head unit and lighter. Congratulations you have a free unit...



To put new head unit in, you need to unscrew the cash tray and put your head unit in from BEHIND where cash tray was, screw the head unit on like the cash tray was held. Hey presto, you got a heavier lower dash

Start putting the bottom bit in, but leave it resting against gear shifter...This will allow you to wire it all, get your Halfords adaptor and plug the old Toyota connections into it, then connect the adaptor the head unit wiring, and if need, plug the head unit wiring into the head unit

Like this

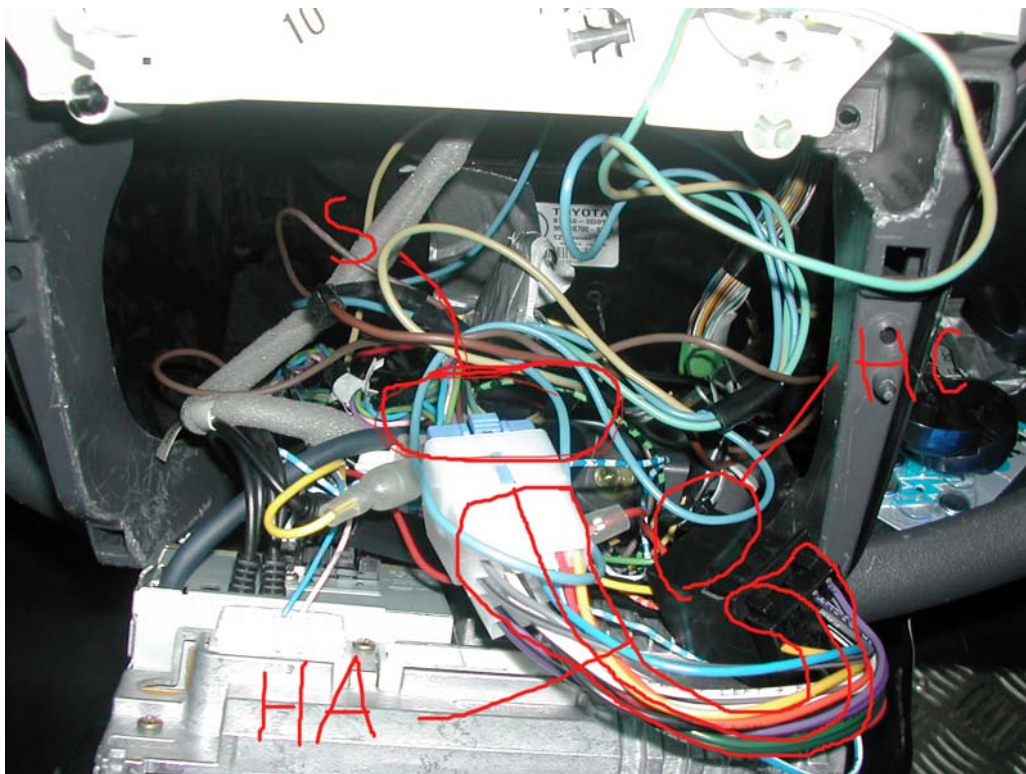

S - Standard plug/wiring
HA - Halfords adaptor
HC - Head unit Connection

After that, get it all put away screw it all in and this should be a finished project



Hope this helps you all!

Tips

1. Don't leave key in ignition this will blow your fuse (when disconnecting and connecting)
2. Test the head unit works before putting everything back

If you find the head units memory resets itself, you need to look for a yellow wire and a red wire, there will be two half's, you need to make sure the red wire is connected to the red wire and the yellow wire is connected to the yellow wire.