

YARIS CLUB UK KNOWLEDGE BASE



Speedo Removal

N.B This is intended as a guide only, if unsure please seek professional assistance. Yaris Club uk accepts no liability, all work is carried out at the owners own risk. This how-to was constructed while working on an echo, as a result there is the possibility of differences in some of the photos

This is an installation of the El prototypes headers for the echo. Also usable for scion's / yaris with 1nz-fe engine.


Well this is a quick run thru of what i did but


Removed Dial surround by pulling up gently and towards myself.

Then you will have this to look at



Next remove two screws either side of the speedo

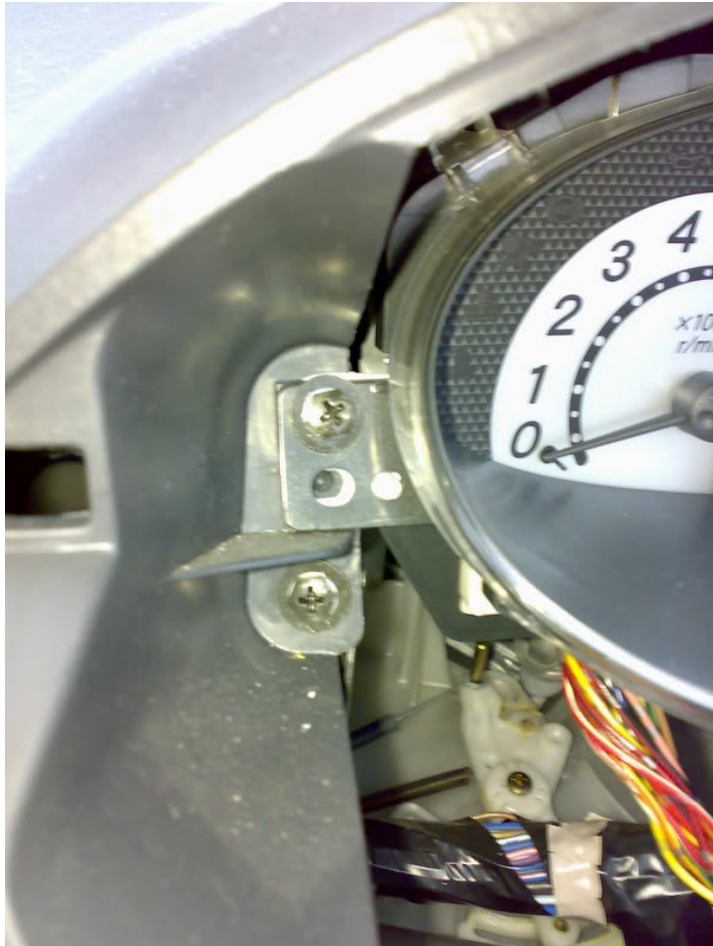

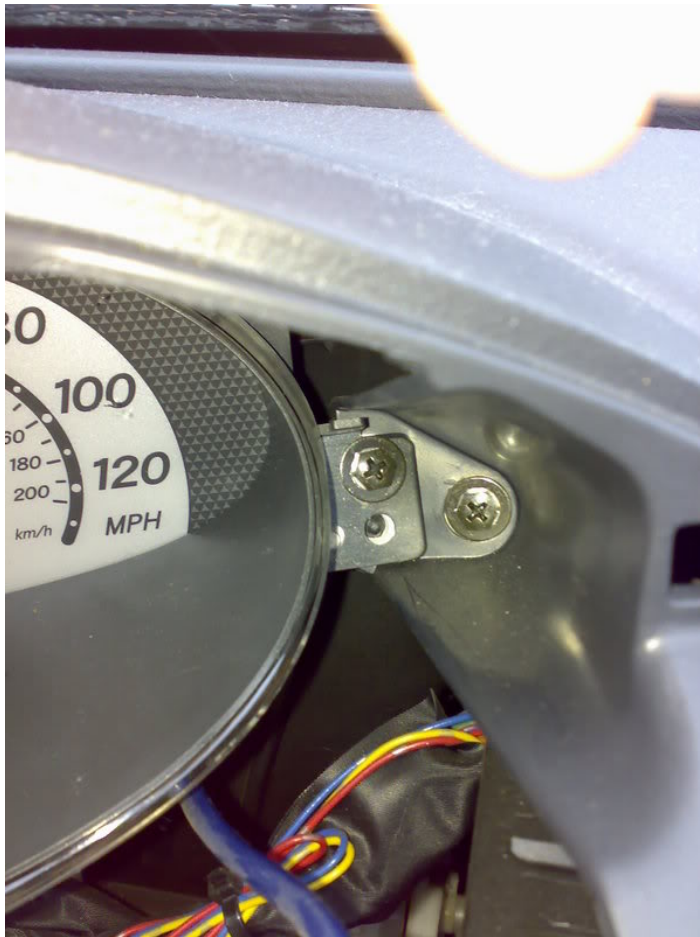

Only removed the 2 higher screws as thats all thats holding it in.



Then the dials were free from the dash all you now need to do is pull out the 3 connectors which are plugged into the dials at the bottom on the front. Carefully!!!

Now inside my warm house i had this



The 3 bulbs you can see in the middle in a line are the ones you need to fiddle with.

Take the bulbs out and 2 of the bulbs have little blue covers on them. Remove them.

I then painted the bulbs red as thats the colour I wanted them.

